

Hilton Dual Brand Breakfast Rail Signs

Installation Guide



Checklist (Items Included)


- ☐ Breakfast Rails
- ☐ Dimensional Letters
- ☐ LED Lighting Strip
- ☐ Light Diffuser

Installation Questions?

Call our customer service team at
888.273.8726

Tools Required (Not included)

- ☐ Tape Measure
- ☐ Level
- ☐ Drill
- ☐ 7/16" Drill Bit
- ☐ Silicone Adhesive
- ☐ Masking Tape

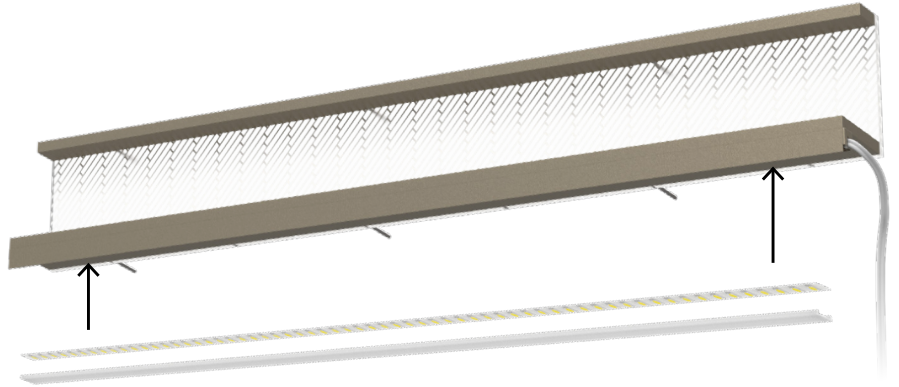

Installation Instructions:

Wipe down the wall to ensure it is free of dirt and dust. Determine where the sign should be placed in your breakfast area.

STEP 1

1. Place threaded 10-24 studs into pre-drilled holes.
2. Line up Rails according to the lettered marks on the reverse side: A/A, B/B etc.
3. Measure and mark the location of studs on wall.
4. Using a 1/4" drill bit, drill the mounting holes into wall.
5. Apply silicone adhesive to all threaded studs and mounting holes.
6. If there is more than one rail section, connect them before mounting.
7. Carefully align studs with mounting holes and press the rail onto the wall until flush against the surface.
8. Secure with masking tape and allow adhesive to set (refer to adhesive instructions).

STEP 2

1. Lights are shipped as a complete strip. After mounting the rails, run the lights inside the bottom channel.
2. Lights should either plug into the wall or be hardwired by an electrician. For sections that are longer than 196", you will need to install and plug in two separate strips of lights.
3. Once everything is working, snap the diffuser into place.

STEP 3

1. Apply mounting template to installed rail using masking tape.
2. Place letters into corresponding slots in mounting template, using preapplied adhesive sheet to mount to rail surface.

